




TECHNICAL SPECIFICATIONS	
VOLTAGE	120 AC 60 Hz
WATTS	1500 W Max
NO HEATER	25 W
MOTOR HEATER	19 W
APPLIANCE WIDTH	59 1/8"
APPLIANCE HEIGHT	19 7/8"
APPLIANCE DEPTH	4"
GROSS WEIGHT	108 lbs
PLUG LOCATION	Left side
CORD LENGTH	70 7/8"
ROUGH WALL OPENING	64" X 20 3/8"
BTU	4800

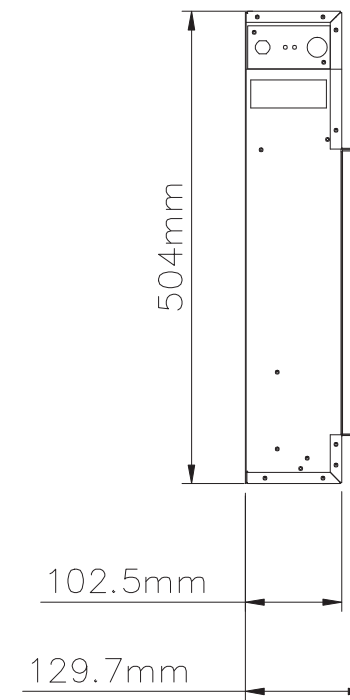


SERIES Built-In	MODEL BI-65-XTRASLSIM / 102765-XS		REV 1
SCALE 1" = 1'-0"	DATE: 11/16/2017	SHEET 1 OF 1	

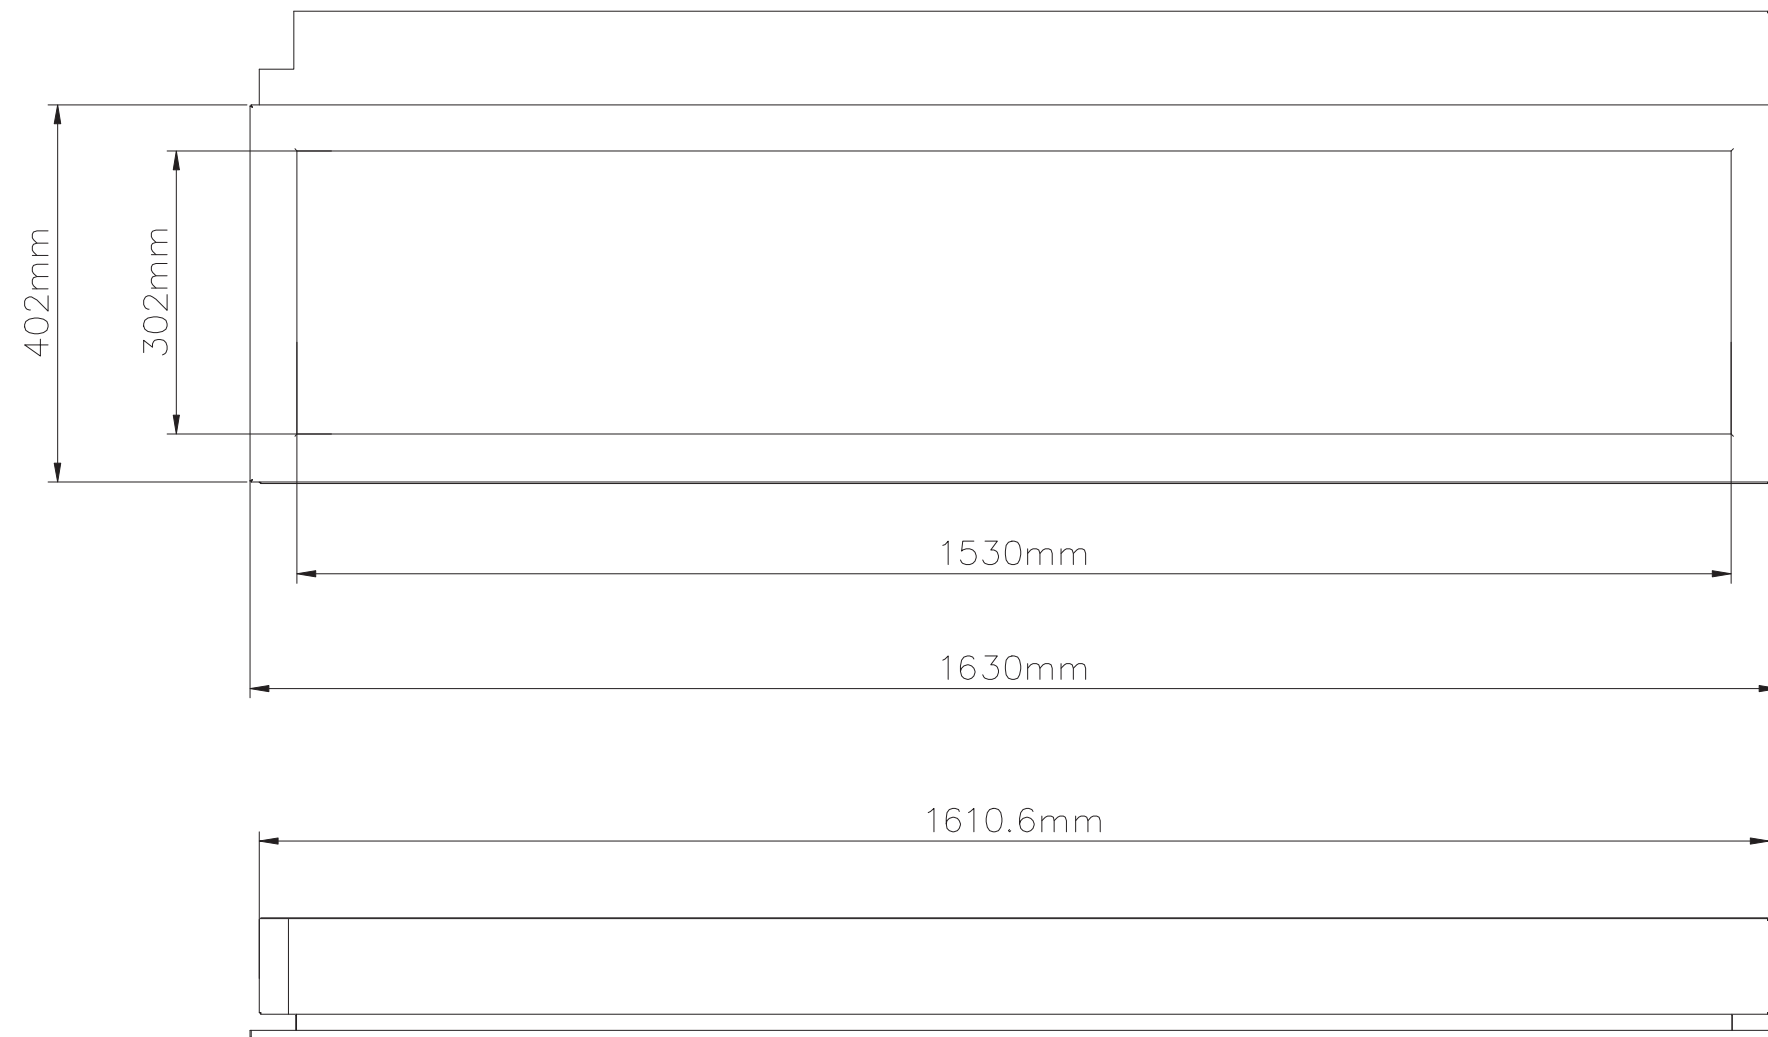

TECHNICAL SPECIFICATIONS	
VOLTAGE	120 AC 60 Hz
WATTS	1500 W Max
NO HEATER	25 W
MOTOR HEATER	19 W
APPLIANCE WIDTH	150.3 cm
APPLIANCE HEIGHT	50.4 cm
APPLIANCE DEPTH	10.25 cm
GROSS WEIGHT	49 kgs
PLUG LOCATION	Left side
CORD LENGTH	180 cm
ROUGH WALL OPENING	162.6cm X 5 2 cm
BTU	4800



SERIES Built-In	MODEL BI-65-XTRASLSIM / 102765-XS		REV 1
SCALE 1" = 1'-0"	DATE: 11/16/2017	SHEET 1 OF 1	