



TECHNICAL SPECIFICATIONS			
VOLTS		120	
AMPS		12.5	
WATTS		1500	
	HIGH	1500 watts	
HEATER	LOW	750 watts	
NO HEATER		22 watts	
	QUANTITY	LED	
LAMPS	WATTS		
	TOTAL WATTS	22 watts	
ROTOR MOTO)R	1 at 5 watts	
HEIGHT, WIDT	H, DEPTH	23 1/2 x 48 1/2 x 12	
GLASS VIEWING OPENING		12" x 45 1/4"	
SURROUND SIZE		15 3/4" x 49 1/4"	
SHIPPING SIZE		25 3/4 x 58 x 14 1/2"	
SHIPPING WEIGHT		111 lbs	
	UNIT		
	GLASS FRONT	Included	
PLUG LOCATI	ON	Left Side	
CORD LENGTH		76''	
APPROX. HEATING AREA		400 sq ft	



SERIES BUILT IN	MODEL BI-50-DEEP	© US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2013	SHEET 1 OF 1	

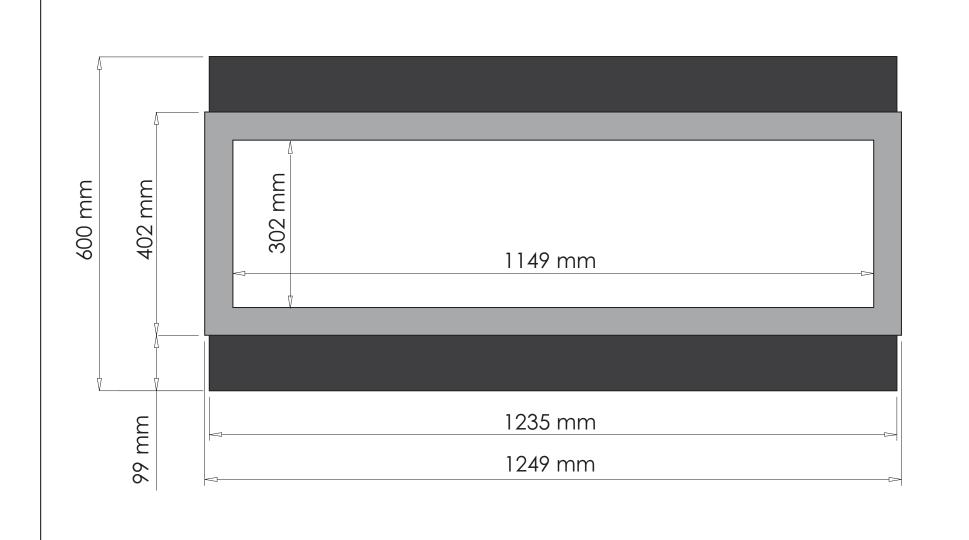

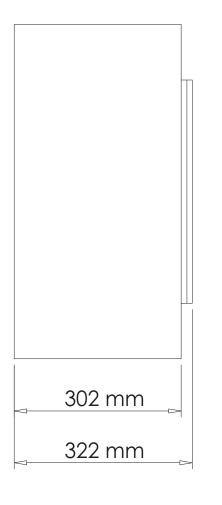

TECHNICAL SPECIFICATIONS			
VOLTS		120	
AMPS		12.5	
WATTS		1500	
	HIGH	1500 watts	
HEATER	LOW	750 watts	
NO HEATER		22 watts	
	QUANTITY	LED	
LAMPS	WATTS		
	TOTAL WATTS	22 watts	
ROTOR MOTO	OR	1 at 5 watts	
HEIGHT, WIDT	H, DEPTH	60 x 123.5 x 30.2 cm	
GLASS VIEWIN	IG OPENING	30.2 x114.9 cm	
SURROUND SI	ZE	40.1 x 124.9 cm	
SHIPPING SIZE		64 x 146.3 x 36.8 cm	
SHIPPING WE	IGHT	50 kg	
	UNIT		
	GLASS FRONT	Included	
PLUG LOCATI	ION	Left Side	
CORD LENGT	H	193 cm	
APPROX. HEATING AREA		37 sqm	



SERIES BUILT IN	MODEL BI-50-DEEP	c ⊕ °us	REV 1
SCALE 1:12	DATE: 11/1/2013	SHEET 1 OF 1	

SERIES	MODEL		REV
BUILT IN	BI-50-DEEP	C US	1
SCALE 1:12	DATE: 11/1/2013	SHEET 1 OF 1	