


TECHNICAL SPECIFICATIONS			
VOLTS		120	
AMPS		12.5	
WATTS		1500	
LIEATED	HIGH	1500 watts	
HEATER	LOW	750 watts	
NO HEATER		22 watts	
	QUANTITY	LED	
LAMPS	WATTS		
	TOTAL WATTS	22 watts	
ROTOR MOTO	OR	1 at 5 watts	
HEIGHT, WIDT	H, DEPTH	23 1/2 x 48 1/2 x 6 3/4	
GLASS VIEWING OPENING		12" x 45 1/4"	
SURROUND SIZE		15 3/4" x 49 1/4"	
SHIPPING SIZE		25 1/4 x 59 3/4 x 9 3/4"	
SHIPPING WEIGHT		106 lbs	
	UNIT		
GLASS FRONT		Included	
PLUG LOCATION		Left Side	
CORD LENGTH		76''	
APPROX. HEATING AREA		400 sq ft	



	.
M	rantii

SERIES BUILT IN	MODEL BI-50-SLIM	c∰* _{US}	REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	



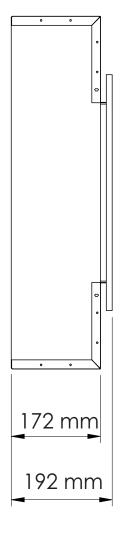

TECHNICAL SPECIFICATIONS			
VOLTS		120	
AMPS		12.5	
WATTS		1500	
HEATER	HIGH	1500 watts	
	LOW	750 watts	
NO HEATER		22 watts	
	QUANTITY	LED	
LAMPS	WATTS		
	TOTAL WATTS	22 watts	
ROTOR MOTO	OR	1 at 5 watts	
HEIGHT, WIDT	H, DEPTH	60 x 123.5 x 17.2 cm	
GLASS VIEWING OPENING		30.2 x114.9 cm	
SURROUND SIZE		40.1 x 124.9 cm	
SHIPPING SIZE		64 x 151.3 x 24.8 cm	
SHIPPING WEIGHT		48 kg	
	UNIT		
GLASS FRONT		Included	
PLUG LOCAT	ION	Left Side	
CORD LENGTH		193 cm	
APPROX. HEATING AREA		37 sqm	



	<i>_</i> ···
mi	antii

SERIES BUILT IN	MODEL BI-50-SLIM	© us	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	