



TECHN	TECHNICAL SPECIFICATIONS				
VOLTS		120			
AMPS		12.5			
WATTS		1500			
	HIGH	1500 watts			
HEATER	LOW	750 watts			
NO HEATER		22 watts			
	QUANTITY	LED			
LAMPS	WATTS				
1	OTAL WATTS	22 watts			
ROTOR MOTOR		1 at 5 watts			
HEIGHT, WIDTH, DEPTH		23 1/2 x 72 1/4 x 12			
GLASS VIEWING OPENING		12 x 68 3/4			
SURROUND SIZE		15 3/4 x 72 3/4			
SHIPPING SIZE		25 1/4 x 81 1/8 x 14 1/2			
SHIPPING WEIG	<b>GHT</b>	157 lbs			
UNIT GLASS FRONT					
		Included			
PLUG LOCATION		Left Side			
CORD LENGTH		76"			
APPROX. HEATING AREA		400 sq ft			



SERIES BUILT IN	MODEL BI-72-DEEP	© US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2013	SHEET 1 OF 1	

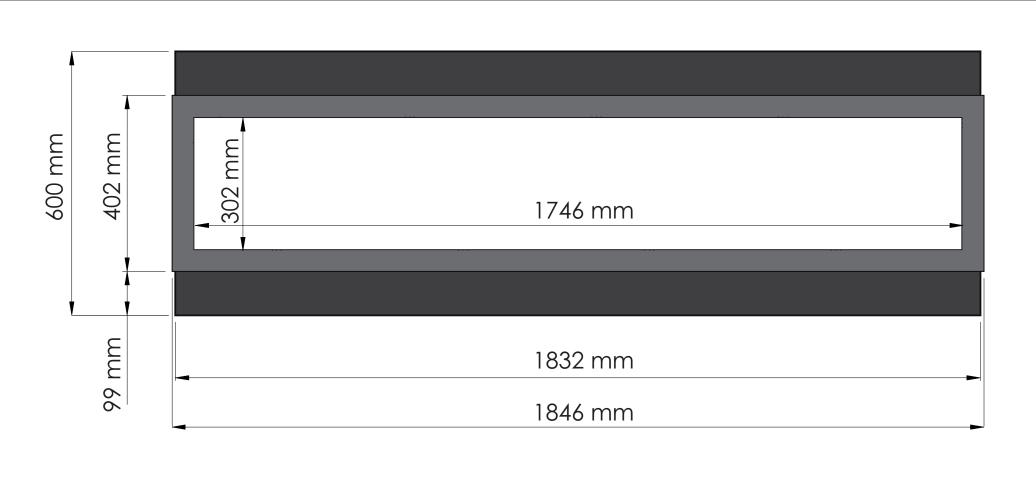

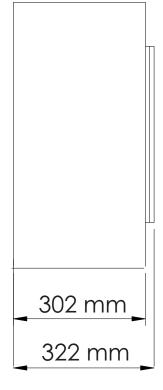

TECHNICAL SPECIFICATIONS				
VOLTS	120			
AMPS	12.5			
WATTS	1500			
HIG	H 1500 watts			
HEATER   LOV	v 750 watts			
NO HEATER	22 watts			
QUANTIT	Y LED			
LAMPS WATT	S			
TOTAL WAT	22 watts			
ROTOR MOTOR	1 at 5 watts			
HEIGHT, WIDTH, DEPTH	60 x 183.2 x 30.2 cm			
GLASS VIEWING OPENIN	G 30.2 x 174.6 cm			
surround size	40.2 x 184.6 cm			
SHIPPING SIZE	64 x 206 x 36.8 cm			
SHIPPING WEIGHT	71 kg			
UN	IIT			
GLASS FROM	Included			
PLUG LOCATION	Left Side			
CORD LENGTH	193 cm			
APPROX. HEATING ARE	A 37 sqm			



SERIES BUILT IN	MODEL BI-72-DEEP	c Us	REV 1
SCALE 1:12	DATE: 11/1/2013	SHEET 1 OF 1	