




TECHNICAL SPECIFICATIONS		
VOLTS		120
AMPS		12.5
WATTS		1500
LIEATED	HIGH	1500 watts
HEATER	LOW	750 watts
NO HEATER		22 watts
	QUANTITY	LED
LAMPS	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOT	OR	1 at 5 watts
HEIGHT, WID	TH, DEPTH	23 1/2 x 88 1/8 x 12
GLASS VIEWING OPENING		11 7/8 x 84 3/4"
SURROUND SIZE		15 7/8 x 88 1/8
SHIPPING SIZ	E	25 1/4 x 97 1/4 x 14 1/2
SHIPPING WEIGHT		197 lbs
	UNIT	
	GLASS FRONT	Included
PLUG LOCAT	ION	Left Side
CORD LENGTH		76''
APPROX. HEATING AREA		400 sq ft



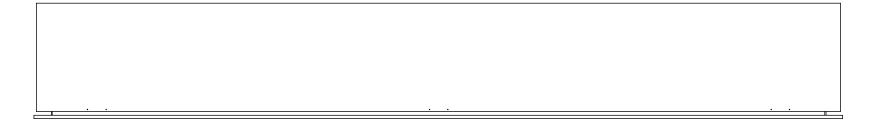

SERIES BUILT IN	MODEL BI-88-DEEP	© US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2014	SHEET 1 OF 1	

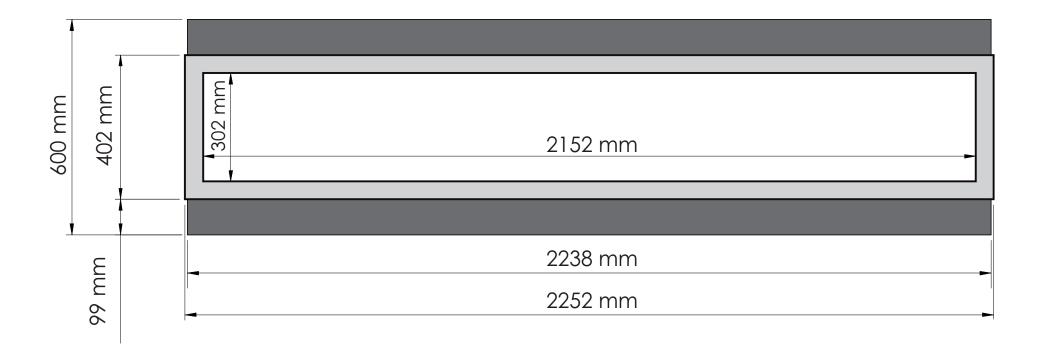



TECHNICAL SPECIFICATIONS		
VOLTS		120
AMPS		12.5
WATTS		1500
LIEATED	HIGH	1500 watts
HEATER	LOW	750 watts
NO HEATER		22 watts
	QUANTITY	LED
LAMPS	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOTO	)R	1 at 5 watts
HEIGHT, WIDT	H, DEPTH	60 x 223.8 x 30.2 cm
GLASS VIEWIN	G OPENING	30.2 x 215.2 cm
SURROUND SI	ZE	40.2 x 225.2 cm
SHIPPING SIZE		64 x 246.7 x 36.8
SHIPPING WEI	GHT	89 kg
	UNIT	
	GLASS FRONT	Included
PLUG LOCATI	ON	Left Side
CORD LENGTH		193 cm
APPROX. HEA	TING AREA	37 sqm

	• •	_· ·



SERIES BUILT IN	MODEL BI-88-DEEP	© US	REV 1
SCALE 1:12	DATE: 11/1/2014	SHEET 1 OF 1	