




1 Select the location of the first panel and level it



2 Place the template and mark the location with the use of screws.

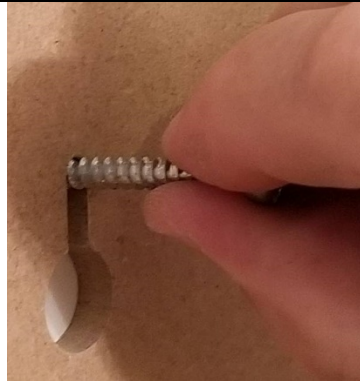

3 Drill the holes for anchor placement (1/4 mesh)




4 Place the anchors in the hole



5 Hammer the anchor into the wall to make it flush



6 Drill in the screw leaving 1/2 of inch

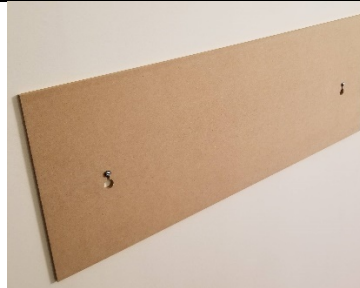

7 Place the template to make the proper adjustments



8 Tighten the screws so that the template is pressed against the wall but has enough space to move up and down



9 Lift the template and remove



10 You may now place your first panel




11 Place the template on top of the installed panel and mark the position




12 Once the second position has been marked, drill 1/4 of inch for anchor placement, insert the anchors, drill in the screws and install the template. You may refer to step #8



13 Remove the template and install your second leather panel. *You may repeat these steps as needed.*

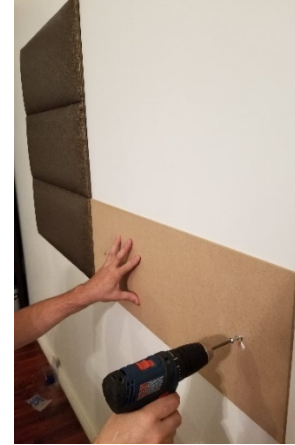

14 Press the template firmly next to the installed leather panel and mark the location (See step #2)

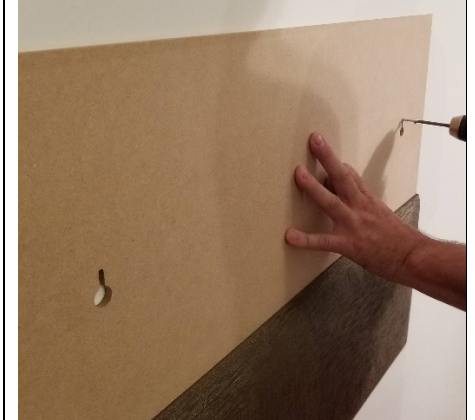


15 You may repeat as needed with the use of step number 12



16 Remove the template



17 Install the leather panel



18 Repeat the steps as needed

