




Wall Panel Installation Guide Vertical Panels


Tools for Install:

- 2 Drills
- Rubber Mallet
- Side Grinder with Cutting Disc
- Nut Driver (1/2" or less) for installing magnets
 - Level
 - Square
 - Measuring Tape
 - Black Magic Marker

Step 1:

- Locate the Vertical Templates and place them upright against the wall.
- Draw marks in the slots on the vertical templates as shown to the right.
- Once you've marked the slots, the Vertical Templates are no longer needed.

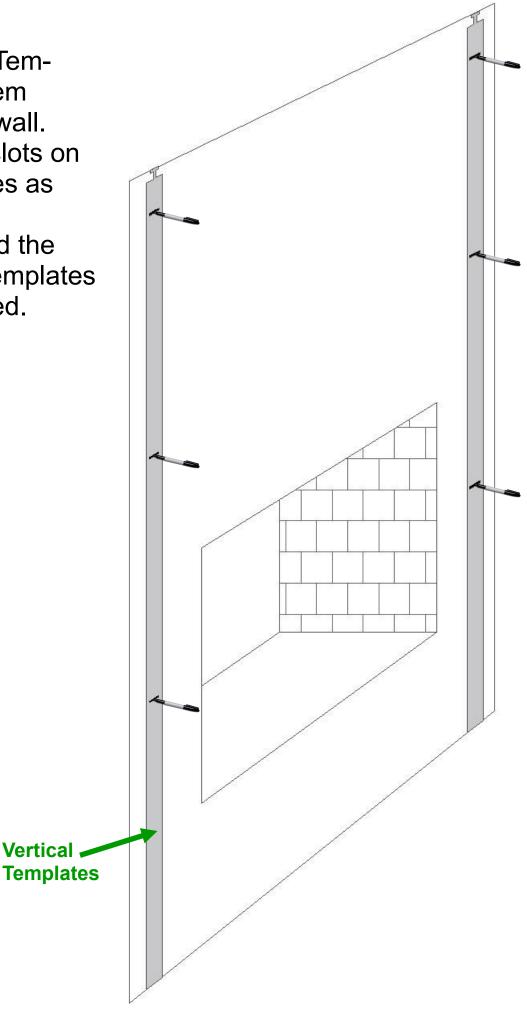

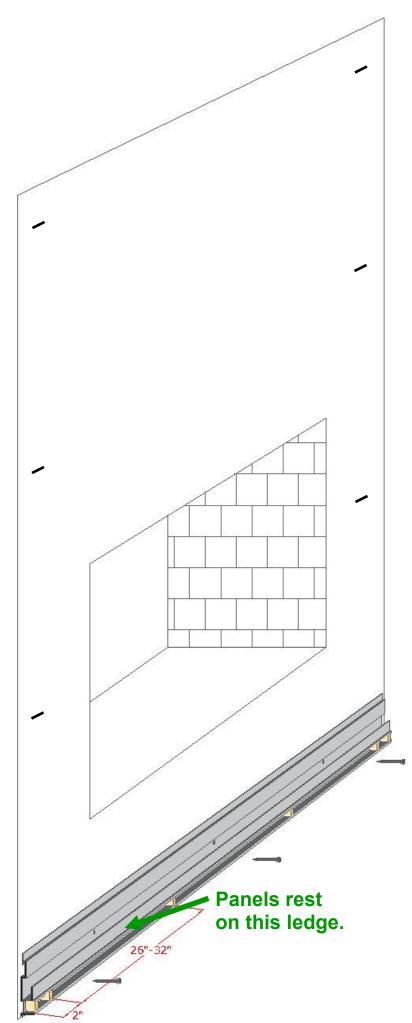


Step 2:

- Locate all bottom wall mount brackets (T21).
- Install magnets in bottom track as shown in diagram. (Tip: Track is tight. Nut Driver and Hammer recommended for install.
- Position and level the brackets at the bottom of the wall.
- Locate studs, and fasten brackets securely to the wall, being sure all brackets are level and on an equal plane.

Step 3:

- Locate all opening surround brackets (T24).
- On raised openings, locate the wall panels to be installed below the opening, and measure the height of the panel below the opening (See diagram)
- Install the surround bracket around the opening, being sure to properly align it to match the height of the panels to be installed below the opening. (See diagram)

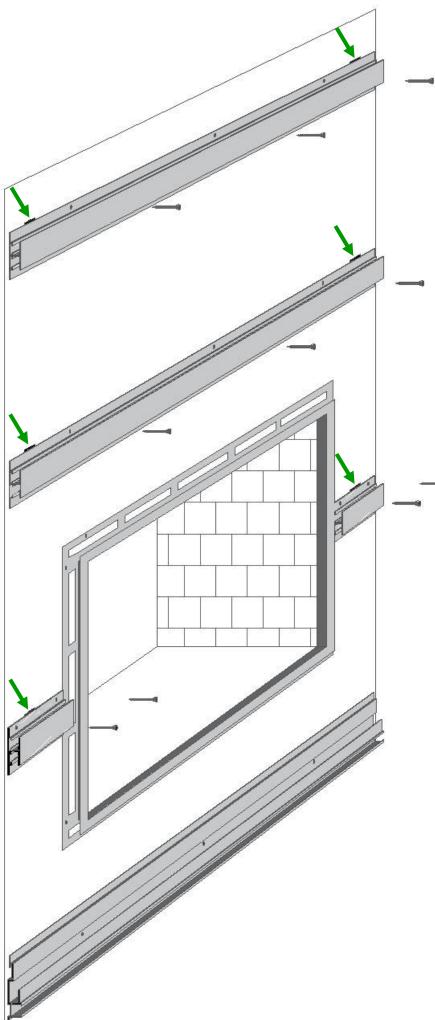



Step 4:

- Locate all middle mounting brackets (T22).
- Align top edge of mounting brackets with marks on wall (See diagram)
- Fasten brackets securely to wall.

Step 5:

- Begin installing wall panels as shown in diagram.
- All mounting brackets should extend approximately 3/4" beyond the end of the panels.
- Panels are numbered on the back side. Check the included drawing to verify panel locations.

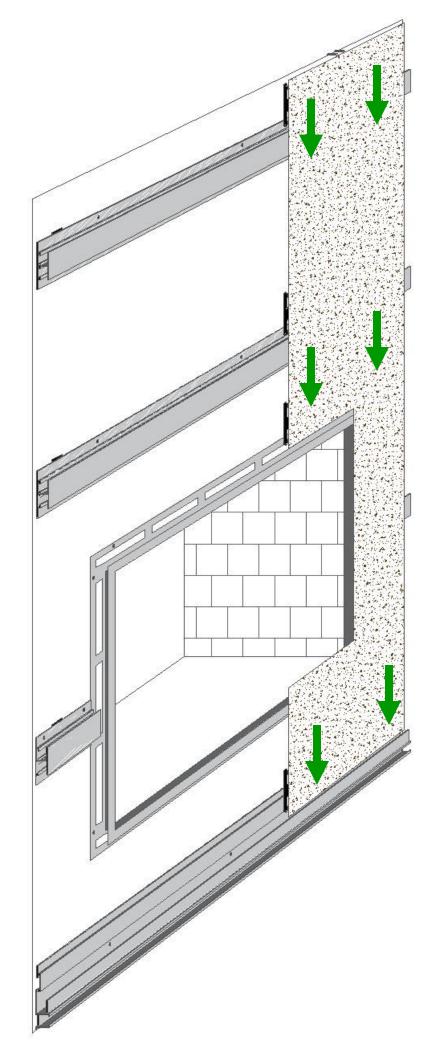

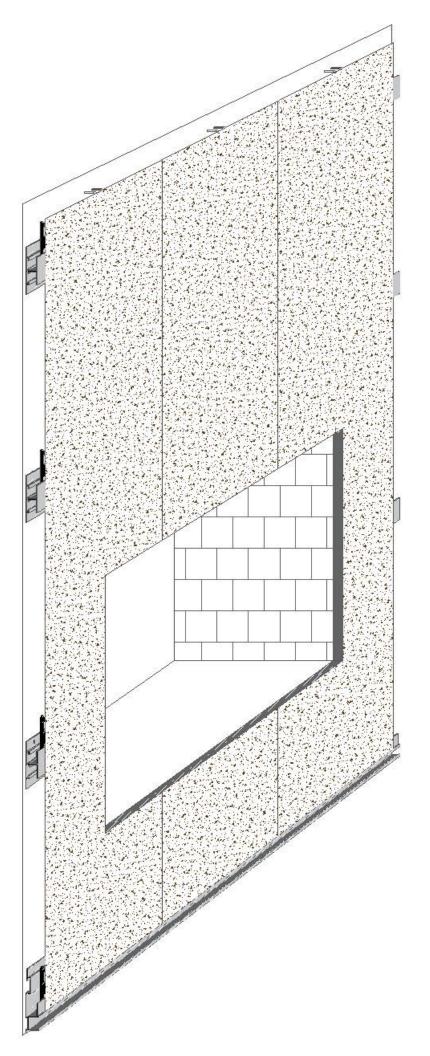



Step 6:

 As needed, continue Step 5 until all wall panels are installed.

Step 7:


- Locate magnets and magnet holders.
- Strategically place magnets innet holders & magnets into the horizontal extrusions at left and right, or screw them directly to the wall above and beside the wall panels.
- See diagram at right for approximate magnet locations.

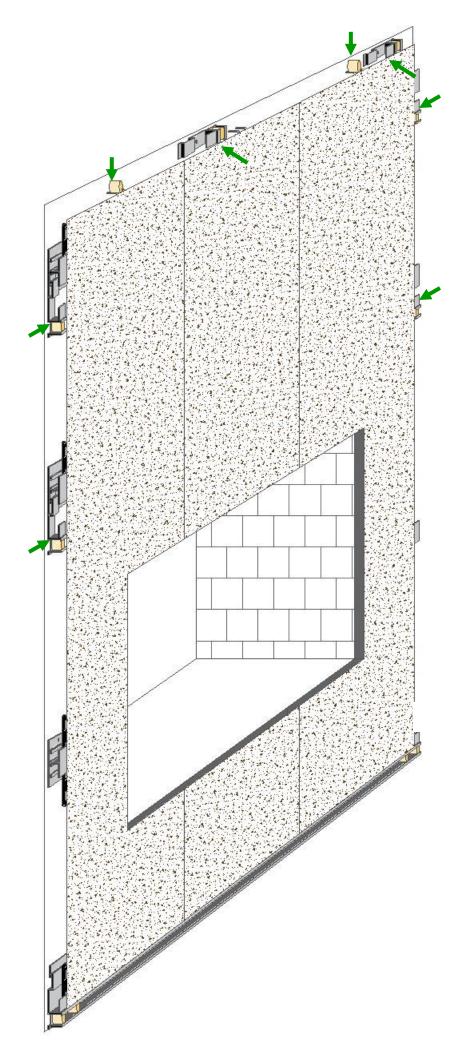

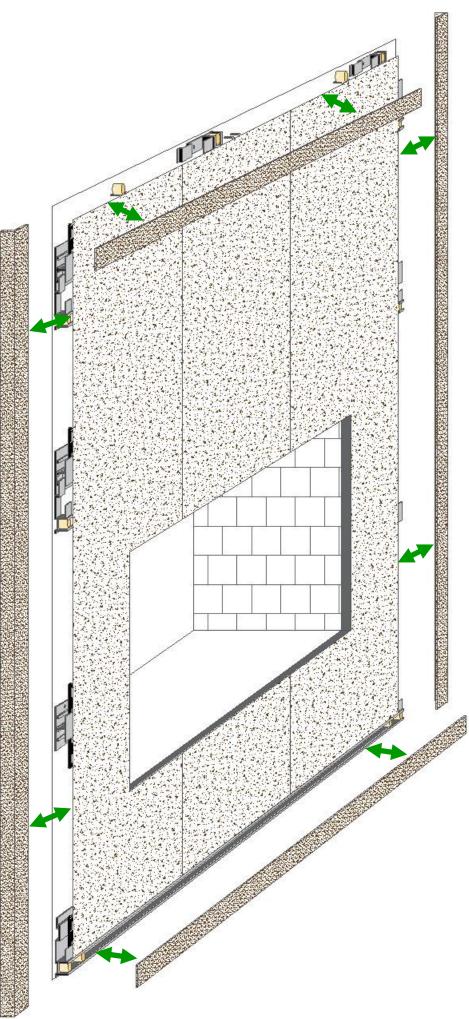

Step 8:


- Locate all trims.
- Trims are numbered on the back side. Check the included drawing to verify trim locations.
- Install vertical trims first.
- Measure the distance between the vertical trims, and check to see that the top & bottom trims are correct length.
- If needed, shorten top & bottom trims to achieve a proper fit.
- If shortened, touch up end of trims with magic marker or touch up paint.

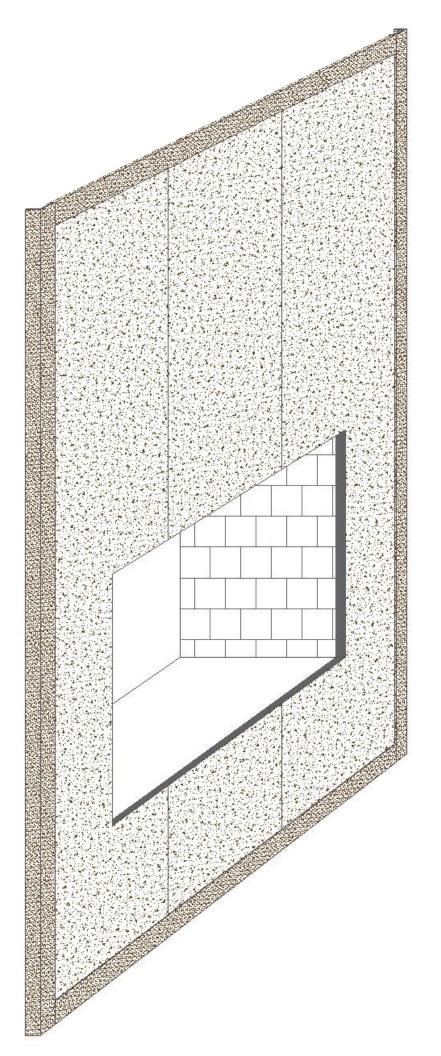



Stoll Industries 153 Highway 201 Abbeville, SC 29620 customerservice@stollindustries.com

www.stollindustries.com



For more information go to www.P65Warnings.ca.gov